

DATASHEET

MPG 60-12 MOVE - GEL



Application

- Wheelchairs
- Scooters, 2/3 and 4 wheels
- Electric Cars
- Electric Boats
- Personal Carriers
- Utility Vehicles


General Features

- Thick plates
- Valve Regulated cells
- Fast recovery
- Very good Initial capacity
- Long life time
- Lifting handle

Construction

- Premium Microrib Flexel Separators
- Special paste for optimum cycleability
- High Quality valve
- Vibration resistant
- Heavy Duty internal connections

Dimensions

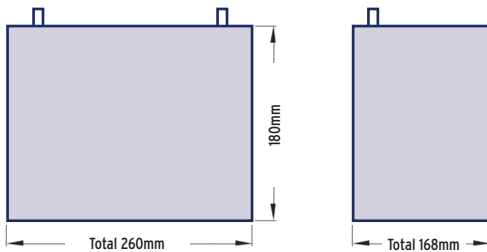

Terminal configuration: FT 6mm



Battery Model	MPG 60-12				
Cycle Life	650 cycles at 50% DOD / 420 cycles at 75% DOD				
Capacity(25 °C)	20HR	10HR	5HR	3HR	1HR
	60Ah	55Ah	52Ah	44Ah	33Ah
Discharge Current of	75Amp	25Amp	20Amp	15Amp	8Amp
Discharge time in min	21	77	105	298	615
Dimensions	Length	Width	Height	Total Height	
	260mm	168mm	- mm	180mm	
Approx. Weight	21,5 kg				
Capacity Affected	22 °C		0 °C		-10 °C